



C5-05A-52UV, Bee

Product composition:

The products are made from high quality EPDM and polyurethane binder.

Installation:

2D graphics is fixed by glue to a particular surface (SBR base layer, asphalt or concrete) by one or two component glue (eg. Casco, Stockmeier, Stauf).


Notes:

The thickness of these graphics is 10mm

Colours:


Yellow, black, teal, rose, pearl
other colours on request

Colour stability - colour may fade and change
due to UV(up to level 3 on gray scale)

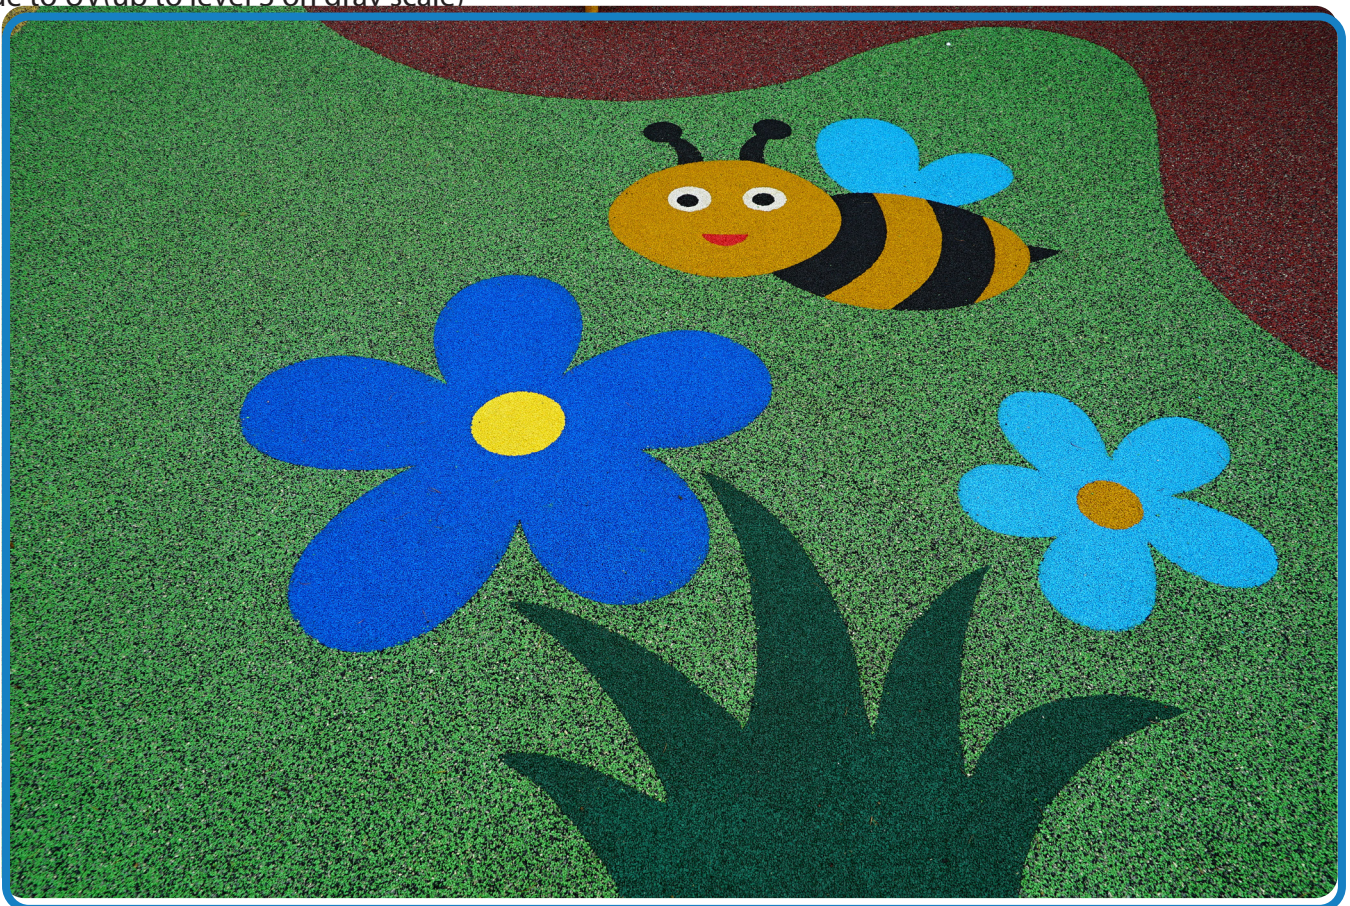

Installation time

15min

Pieces

1pc


Number of installers


Weight

8kg

Amount of glue

2,28kg

110cm

85cm