



# G3-02A-58UV, Fire hose nozzle

## Product composition:

The products are made from high quality EPDM and polyurethane binder

## Colours:


Light grey, rose, black  
Colour stability - colour may fade and change due to UV(up to level 3 on gray scale)






## Installation:

2D graphics is fixed by glue to a particular surface (SBR base layer, asphalt or concrete) by one or two component glue (eg. Casco, Stockmeier, Stauf).
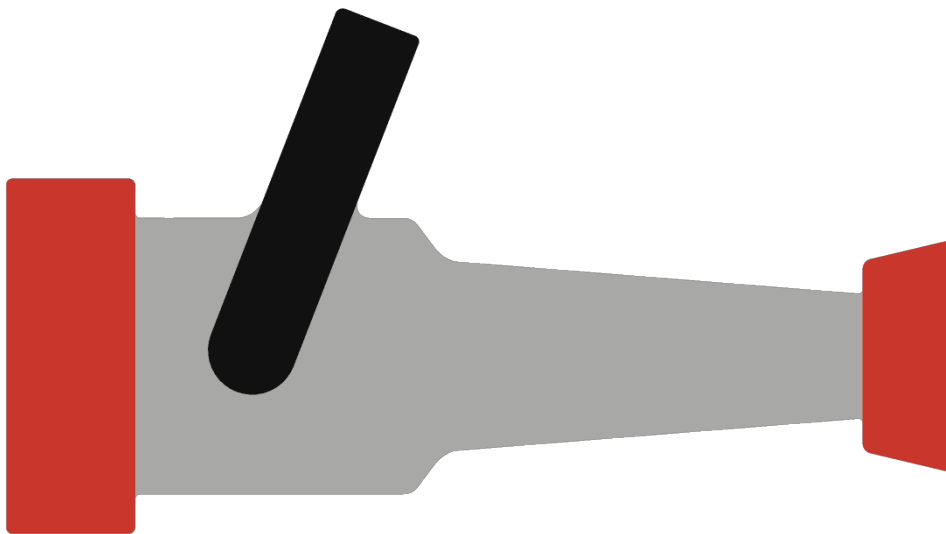
## Notes:

The thickness of these graphics is 10mm



<b>Installation time</b>  15min	<b>Pieces</b>  1pc	<b>Number of installers</b> 	<b>Weight</b>  0,8kg	<b>Amount of glue</b>  0,24kg	<b>Dimensions</b>  48cm x 27cm
--	---	--	---	--	---